



2025-09-17


Lyreco LCA

Life Cycle Assessment

The methodology in this report is based on ISO 14040

20513406 (sold in SE)

Summary

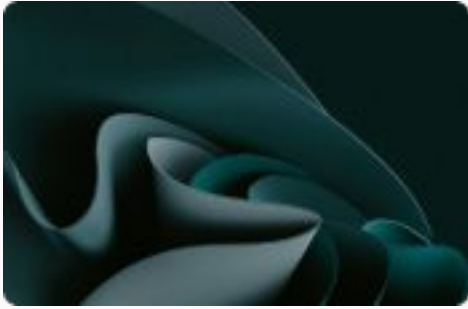

01 | Methodology



02 | Results

01

Methodology

Environmental Impact Assessment

Functional unit

The functional unit is a quantified performance of a product system for use as a reference unit. One of the primary purposes of a functional unit is to provide a reference to which the input and output data are normalized (in a mathematical sense).
The functional unit of this analysis is "1 set(s) of bound pages of paper for the purpose of writing".

Impact Indicator

The impact is measured through the "IPCC 2013 GWP 100a" method.

Electricity impact calculation method

Following guidelines from the GHG Protocol, the impact of electricity is calculated using the location-based approach. This means that the emission factors used represent the average annual carbon intensity of the power grid in the country the processes take place in.

Hypothesis

Environmental Impact Assessment

System Boundaries

The scope of this research includes the complete lifecycle of a notebook from raw material extraction to disposal options for each material, which is the cradle-to-grave perspective.


Exclusions

The impact of secondary packaging and writing utensils are excluded from this assessment.

02

Results


20513406 (sold in SE)
 Climate Change

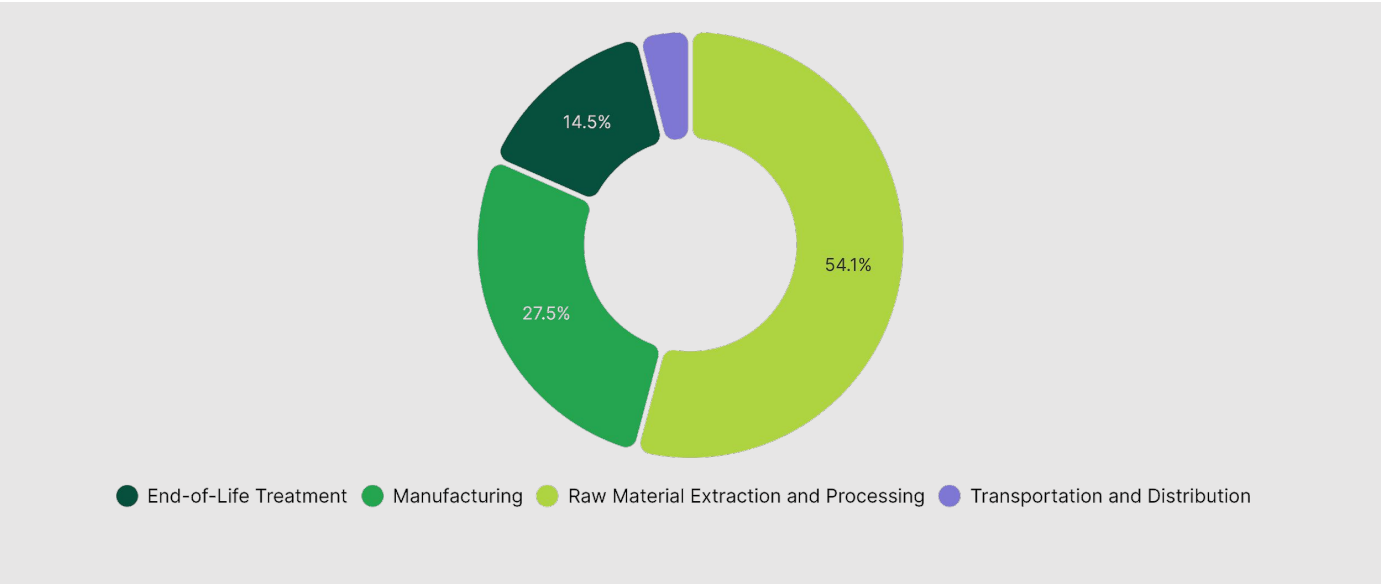

Step	Impact (kg CO ₂ eq)	Percentage (%)
Raw Material Extraction and Processing	0.95	54.13 %
Manufacturing	0.48	27.48 %
End-of-Life Treatment	0.25	14.45 %
Transportation and Distribution	0.07	3.94 %
TOTAL	1.76	100.00 %

20513406 (sold in SE)

Climate Change - Raw Material Extraction and Processing

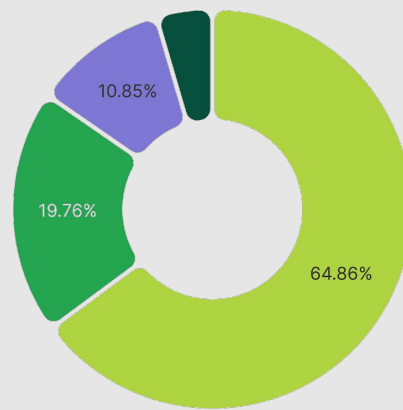


● Sourcing of raw material (adhesive)
 ● Sourcing of raw material (bleached kraft paper)
 ● Sourcing of raw material (polyurethane fiber)
 ● Sourcing of raw material (synthetic rubber)

Activity	Emission Factor Num	Quantity	Impact (g CO ₂ eq)	Percentage (%)
Sourcing of raw material (polyurethane fiber)	2	0.09	618.45	64.86 %
Sourcing of raw material (bleached kraft paper)	1	0.38	188.37	19.76 %
Sourcing of raw material (synthetic rubber)	4	0.04	103.45	10.85 %
Sourcing of raw material (adhesive)	3	$7.92 \cdot 10^{-3}$	43.2	4.53 %
TOTAL				953.47 100.00 %

20513406 (sold in SE)

Climate Change - Manufacturing

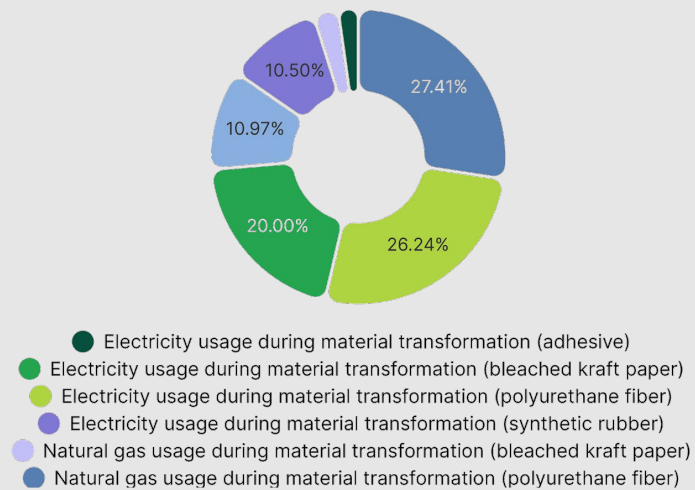

Activity	Emission Factor Num	Quantity	Impact (g CO ₂ eq)	Percentage (%)
Natural gas usage during material transformation (polyurethane fiber)	6	0.73	132.68	27.41 %
Electricity usage during material transformation (polyurethane fiber)	5	0.18	126.99	26.24 %
Electricity usage during material transformation (bleached kraft paper)	5	0.13	96.8	20.00 %
Natural gas usage during material transformation (synthetic rubber)	6	0.29	53.07	10.97 %
Electricity usage during material transformation (synthetic rubber)	5	0.07	50.8	10.50 %
Natural gas usage during material transformation (bleached kraft paper)	6	0.07	13.01	2.69 %
Electricity usage during material transformation (adhesive)	5	0.01	10.64	2.20 %
TOTAL			483.98	100.00 %

20513406 (sold in SE)


Climate Change - Transportation and Distribution



Activity	Emission Factor Num	Quantity	Impact (g CO ₂ eq)	Percentage (%)
Freight	7	0.36	69.33	100.00 %
TOTAL			69.33	100.00 %

20513406 (sold in SE)

Climate Change - End-of-Life Treatment

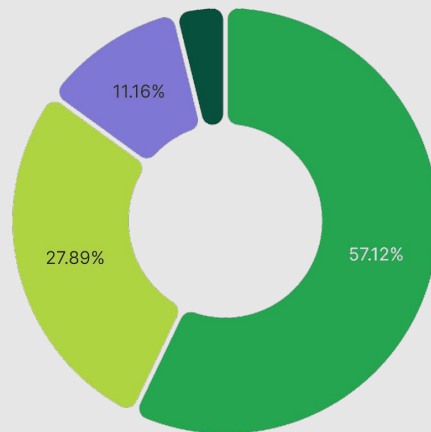

● End of life (adhesive)
 ● End of life (bleached kraft paper)
 ● End of life (polyurethane fiber)

Activity	Emission Factor Num	Quantity	Impact (g CO ₂ eq)	Percentage (%)
End of life (bleached kraft paper)	9	0.25	145.43	57.12 %
End of life (polyurethane fiber)	8	0.07	71	27.89 %
End of life (synthetic rubber)	8	0.03	28.4	11.16 %
End of life (adhesive)	10	$7.2 \cdot 10^{-3}$	9.75	3.83 %

--	--	--	--	--

TOTAL			254.58	100.00 %
-------	--	--	--------	----------

Contact us

Alexis Normand CEO

www.greenly.earth